

Indicator

Type UL200 - Low Profile

Publication Number: PB136/0517

Application

The UL200 Illuminated Legend Indicator is an economically priced vandal resistant indicator, whose clean design will match the decor of any lift.

Back lighting of the pressel ensures a brilliant and clearly illuminated legend, easily visible at long distances and from wide angles.

Operation

LED Illumination

The four or eight surface mounted LED's brightly illuminate the hidden legend. 12V, 24V or 30V units are available and both will accept a.c. or full wave rectified d.c. with a $\pm 15\%$ voltage tolerance, taking approximately 20mA of current. The average operating life of the UL200 LED Illuminator is in excess of 100,000 hours. Colours available are red, green and amber.

Construction

The low profile indicator body and hidden legend screen are made from flame retardent polycarbonate to provide a high degree of vandal resistance.

Connections are by 250 series female, fully insulated, connectors.

UL200 - Low Profile Indicator can be supplied loose or incorporated into stations with 1.5mm stainless steel faceplates at a 45mm horizontal pitch.




Marking

The UL200 - Low Profile is available in a wide range of Hidden Legend Indicators for special functions such as "Out of Service". These legends have dark polycarbonate windows which render the legend completely invisible until illuminated. Please refer to our website for available hidden legend markings.

For information on cutouts and stud positions, please refer to Publication Number: PB104.

UL200 LED ILLUMINATED INDICATOR ASSEMBLY - LOW PROFILE

TEXT SHOWN
IS AN EXAMPLE
ONLY

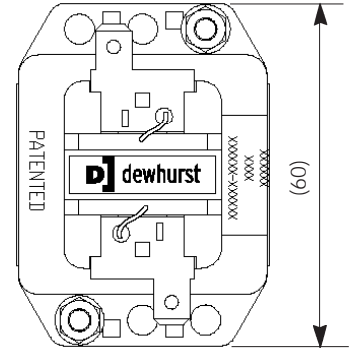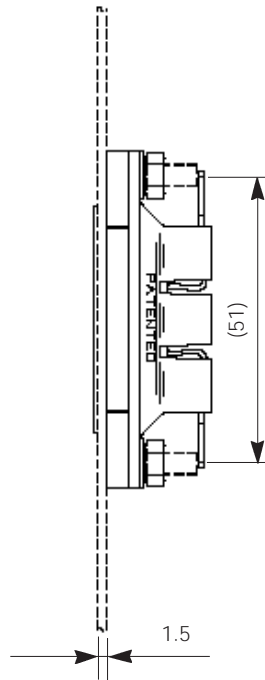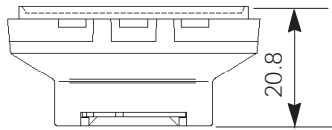

NOTE:
FACEPLATE AND WELDSTUDS (SHOWN DASHED) SHOWN
FOR ASSEMBLY PURPOSES

All dimensions in mm